




## Floorsafe Full step rubber Safety stair nosing

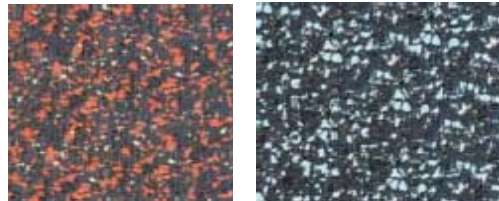

### STEPS & STAIRWAYS:

Everlast is ideal for steps & landings because it offers slip resistance under wet or dry conditions, noise reduction and long term wear properties.

Floorsafe International custom makes each tread & landing to the size required with a choice of two nosings. Everlast has outstanding slip resistance, wet or dry.

Available in four standard colours grey/black, red/black, green/black & plain black.

### Technical Data – Floorsafe Everlast Rubber

Roll width 1.25 metres

Roll length Up to 40 lineal metres


Thickness 5mm and 8mm (various available upon request)

Weight 1015 grams, per mm, per square metre

BEFORE



AFTER

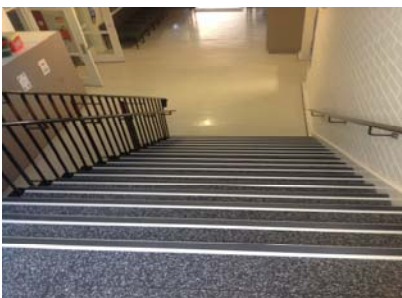

Density 1015kg/m<sup>3</sup>

Tensile strength approx. 2.35 N/mm<sup>2</sup> (DIN 53 571 specimen B)

Tear resistance approx. 15.5 N/mm (DIN 53515 Graves)

Material EPDM and rubber granules, PUR binder

Temperature resistance -40°C to 115°C Installation permanently adhered, subject to site conditions

Slip Resistance Attested to AS/NZS 4586 : 1999, Appendix A,

Appendix C, Appendix D Fire Indices Attested to AS/NZ 1531999