




## FIBREGLOSS STAIR NOSINGS

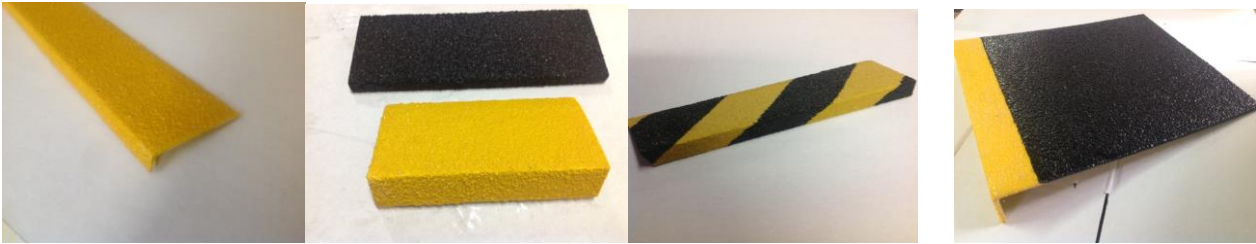

### Introduction

Our very popular Fibregloss Stair Nosing's are specially designed to be installed over new and existing steps and stairways where pedestrian safety, stair appearance & stair longevity is of particular concern.

### Ultimate in Anti-slip Safety

Our Fibregloss products exceed the requirements of the Australian/New Zealand Standards AS4586 -2013, Slip resistance classification of new pedestrian surface material and the National Construction Code section D2.13.

### Compliance

Floorsafe's FG10 (10mm x 70mm) meets the requirements of National Constructions Code 3.2 and the Australian/New Zealand Standards AS1428.1 – 2009, Design for access and mobility, Part 1

### Product Information

- Manufactured from premium vinyl ester resin
- Manufactured with 36# Grade Silicon oxide Grit
- Flame retardant – Spread of flame Class 1 25 or less
- Superior corrosive resistant to acids, caustics, petrochemical & waste water
- LRV Yellow: 41
- LRV Black: 5
- Slip resistance Classification P5

### Sizes and Colours

- Plain Black and Plain Yellow
  - 30mm x 70mm
  - 10mm x 70mm
- Yellow/Black Hazardous Stripe
  - 30mm x 70mm
- Black with Yellow Front – 30mm x 345mm

### Length

- Available in 3620mm lengths or cut to required size

### Fixing

- On suitable surfaces the nosing can be fixed using an adhesive or by drilling and screwing
- For open grating 38mm x 38mm x 38mm stainless steel saddle/grating clips are available as picture below.



201 Franklin Street, Adelaide, SA 5000  
Ph: (61) 8 8410 0054 Fax: (61) 8 8410 0058  
info@floorsafe.com.au  
[www.floorsafe.com.au](http://www.floorsafe.com.au)

Last Updated July 2015