



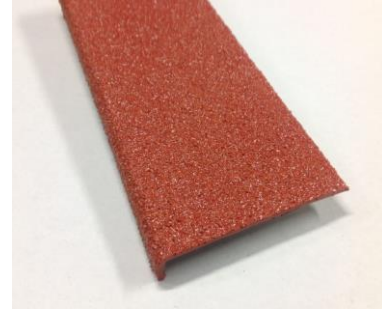

## FIBREGLASS PLUS STAIR NOSINGS



### Introduction

The Floorsafe Fibreglass Plus Stair Nosing is capable of dealing with the busiest of environments. Manufactured from a Fibreglass base it has been enhanced & strengthened by adding two further layers of Polyurethane. Finished with a diamond oxide grit finish provides an excellent slip resistant surface that will last for many years. Our very popular Fibreglass Stair Nosing's are especially designed to be installed over new and existing steps and stairways where pedestrian safety, stair appearance & stair longevity is of particular concern.

### Ultimate in Anti-slip Safety

Our Fibreglass Stair Nosing's are manufactured with an anti-slip grip finish. Its rating is a P5 - R12 and producing the highest possible safety rating. It is particularly suitable for external wet areas. This product exceeds the requirements of the Australian/New Zealand Standards AS4586:2004 having a Slip resistance classification of a MEAN 71 P5 classification.

### Compliance

Our Fibreglass Plus stair Nosing having a maximum depth of 10mm and being 70mm in width meets the luminance contrast requirements of National Constructions Code 3.2 and the Australian/New Zealand Standards AS1428.1 – 2009, Design for access and mobility, Part 1

### Product

- Manufactured from premium vinyl ester resin.
- Coated with two layers of Polyurethane.
- Chemical & fade resistant
  - Excellent resistance to atmospheric exposure
- Manufactured with 60# Grade diamond oxide Grit
- Flame retardant – Spread of flame Class 1 25 or less
- Superior chemical resistant to acids, caustics, petrochemical & waste water

### Colours

- Select from the standard colours below. Other colours available at extra cost.

### Sizes

- 30mm x 70mm & 10mm x 70mm

### Length

- Available in 3620mm lengths or cut to required size

### Fixing

- On suitable surfaces the nosing can be fixed using an adhesive or by drilling and screwing
- For open grating 38mm x 38mm x 38mm stainless steel saddle/grating clips are available..

## Standard stock Colours



*Please bear in mind that photos may slightly differ from actual item in terms of colour due to the lighting during photo shooting or the monitor's display. We have made every effort to display, as accurately as possible, the colours of our products. However, as the actual colours you see will depend on your monitor, we cannot guarantee that your monitor's display of any colour will be accurate.*

#### **Luminance Contrast**

As part of the NCC volume 1 stair nosing's are required to have a 30% luminance contrast between the surface and the tread insert. Test reports are available for the Y14 Golden Yellow and N61 Black

*\* LRV's have been provided to Floorsafe Australia by the manufacture*

Ph: 1300 717 769 Fax: 1300 400 434  
sales@floorsafe.com.au  
[www.floorsafe.com.au](http://www.floorsafe.com.au)