



FLOORSAFE®

AUSTRALIA PTY LTD

PRODUCT CATALOGUE



INDEX

Why Choose Floorsafe Anti-Slip Products?	2
Test Report and Approval Logs	3
Some of Our Valued Clients.....	4
Stair Nosings	
Aluminium.....	5-6
Fine Line Range	7
Carborundum Range.....	8-9
Luminous Range.....	10
Fibreglass Stair Nosings and Ladder Rungs.....	11
RMN Safety Treads and Plates	12
Rubber Stair Nosing.....	12
Compliant Range	13
Safety Strips / Inlays	
All Types.....	14
Tactiles	
Stainless Steel Tactile Indicators.....	15-16
PVC Tactiles.....	17
Self Adhesive Peel & Stick Tactile Pads	17
Quick-Fix Self-Adhesive Tactiles.....	17
Stainless Steel Tactile Plates and Templates.....	18
Templates.....	18
Deterrents	
Skateboard.....	18
Safety Rubber	
Full Step Rubber Treads.....	19
Tapes	
Anti-Slip 36# and 60# Grade Tapes.....	20
Self-Adhesive Non-Abrasive Safety Tapes.....	20
Anti-Slip Self-Adhesive Mats.....	20
Luminous Tapes.....	21
Surface Primer	21
Conformable Checker Plate Anti-Slip Tape	22
Class 1 and Class 2 Reflective Tapes.....	23
Anti-Slip Solutions	
Anti-Slip Treatment for Tiled Floors.....	24
Floorsafe Bath & Shower Safe	25
CMC Maintenance Cleaner	26
DMC Maintenance Cleaner.....	27
Add-A-Grip.....	28



Why choose Floorsafe Anti-Slip Products?

For over 25 years, Floorsafe Australia safety products have been at the forefront in solving a multitude of workplace and domestic safety issues.

We source and find suitable cost effective ways of dealing with these issues and implement our solutions quickly and efficiently.

In today's world, with people rushing around, the chances of an accident/injury is more likely than ever. Prevention is the key.

Through a consultation with one of our experts and by choosing Floorsafe safety products, we can help you to prevent your staff and customers from work related slip and fall accidents.

Doing what you can to protect yourself from damage-compensation claims can lead to lower insurance premiums.

Research also shows that having safer walk surfaces will lead to higher productivity.

A duty of care is a must. Protecting your staff, employees and customers has proven to save money and produce a safe and happy work environment.

Do not go another day with the uncertainty of liability.

We are very aware that all projects have budgetary constraints, so we remain cost conscious and always consider affordability.

There are many reasons why builders, contractors and architects choose Floorsafe Australia products. We pride ourselves on our customer service and have become a market leader because of our focus on producing and providing quality and reliable solutions at an affordable cost.

Whilst there are competitors offering alternative products, the long history and experience of Floorsafe Australia in finding the correct solution to all kinds of problems, is the assurance our customers are looking for.

We have the expertise and quality products that are needed to keep people safe.

Consequently, Floorsafe Australia has become a favourite brand name for reliability for over 25 years.

Call the Floorsafe Australia advice hot-line today

Ph: 1300 717 769 Overseas call (61) 8 8410 0054

Fax: 1300 400 434 Overseas (61) 8 8410 0058

Email: info@floorsafe.com.au

Order by phone or fax or shop on line www.floorsafe.com.au

TEST REPORT and APPROVAL LOGS



1. INTRODUCTION

A request was received from the client to determine the slip resistance of a collection of their anti-slip products. The collection included the following product ranges:

- Tactiles – seven products tested
- Tapes – five products tested
- Strips and Inserts – three products tested
- Stair Nosings – five products tested
- Rubber Flooring – one product tested

2. TEST PROGRAM

Slip resistance was determined in accordance with Appendix A of AS 4586:2013 "Slip resistance classification of new pedestrian surface materials". Testing was carried out at five sites on each sample in a wet condition using a British Pendulum fitted with a Slider 96 (4S) rubber slider.

3. RESULTS

Results are summarised in the table below. Full test data are detailed in Appendix A of this report.

Product	Classification	Slip Resistance Value - SRV (Range)
TACTILES		
Stainless Steel Rubber Infill Tactile – T022	P5	68 (61 - 73)
Individual Plastic Tactiles – T09	P5	71 (66 - 76)
Stainless Steel Carborundum Infill Tactile – T05 & T06	P5	72 (68 - 77)
Concentric Ring Tactile – T01, T02, T03, T07, T08, T024, T025	P5	68 (65 - 71)
Self stick Tactile Pad – T20	P5	63 (62 - 65)
300x600 Rubber Tactile Pad – T10	P4	45 (44 - 47)
Ceramic Tactile Paver	P5	61 (60 - 62)
TAPES		
36# Aluminium oxide grit self-adhesive tape	P5	80 (80 - 82)
60# Aluminium oxide grit self-adhesive tape	P5	83 (81 - 85)
Conformable anti slip tape – Medium 36# aluminium oxide grit	P5	80 (77 - 82)
Non Abrasive anti slip tape	P3	40 (37 - 41)
Heavy Duty Clear 36# grit anti slip tape	P4	46 (44 - 48)
STRIPS / INSERTS		
Rubber insert 50mm	P5	66 (61 - 71)
Metal anti slip strip / insert 50mm	P5	76 (73 - 79)
Fibreglass anti slip strip / insert 50mm	P5	71 (66 - 77)
STAIR NOSINGS		
Rubber Stair Nosing – SN60	P5	60 (57 - 62)
Fibreglass Stair Nosing – Hazard – FGH	P5	73 (72 - 74)
Fibreglass Stair Nosing – Normal – FG1	P5	71 (69 - 73)
Franklin Stair Nosing range – RC20	P5	85 (73 - 98)
Anodised Aluminium Stair edging – RST50	P4	53 (51 - 56)
RUBBER FLOORING		
REGUPOL Rubber Flooring – Everlast rubber	P2	31 (29 - 32)

SOME OF OUR VALUED CLIENTS



ASIC
Australian Securities & Investments Commission



Government
of South Australia



BOMBARDIER
the evolution of mobility



Aluminium Stair Nosings

Product code: RNS 25mm x 48mm

Anodised Serrated Aluminium 10um

Weight: 0.471Kg/m

Length: 3620mm or cut to required size



Product code: RNR 28mm x 51mm


Anodised aluminium 10um with countersunk holes

Insert: 42mm Nitrite PVC rubber

Black – yellow – grey

Weight: 0.41Kg/m

Length: 3620mm or cut to required sizes

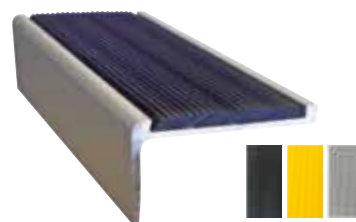

Product code: RCC 30mm x 60mm

Anodised aluminium 10um with countersunk holes

Insert: 42mm Nitrite PVC rubber

Black – yellow – grey

Weight: 0.621Kg/m

Length: 3620mm or cut to required sizes



Product code: RCB 30mm x 60mm


Anodised aluminium 10um with countersunk holes

Insert: 42mm Nitrite PVC rubber

Black – yellow – grey

Weight: 0.471Kg/m

Length: 3620mm or cut to required sizes

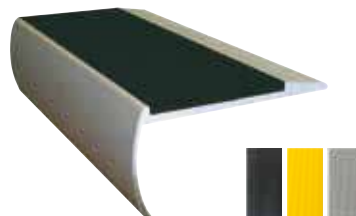

Product code: RCF 37mm x 71mm

Anodised aluminium 10um with countersunk holes

Inserts available: 51mm Carborundum or

PVC Nitrite rubber – Black – yellow – grey

Weight: 0.71Kg/m



Length 3620mm or cut to required sizes

Product code: RNR10 10mm x 57mm

Anodised Aluminium with countersunk holes

Inserts available: 51mm PVC Nitrite rubber –
Carborundum or luminous glow-in-the-dark

Weight 0.64Kg/m

Length 3620mm or cut to size



Aluminium Stair Nosings

Product code: RCF10 10mm x 71mm

Anodised Aluminium 10um with countersunk holes

Inserts available: 51mm PVC Nitrite rubber –
Carborundum or luminous glow-in-the-dark

Weight: 0.615Kg/m

Length: 3620mm or cut to size



Product code: RCF10BLK 10mm x 71mm

Anodised Aluminium 10um with countersunk holes

Inserts available: 51mm PVC Nitrite rubber –
Carborundum or luminous glow-in-the-dark

Weight: 0.615Kg/m

Length: 3620mm or cut to size




Product code: RKZ 37mm x 75mm

Anodised Aluminium with 8mm countersunk holes

Inserts available: 51mm PVC Nitrite rubber –
Carborundum or luminous glow-in-the-dark

Weight: 0.694Kg/m

Length: 3620mm or cut to size

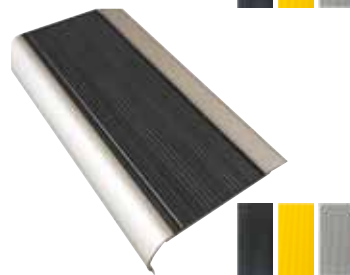

Product code: RNAC 37mm x 75mm


Anodised Aluminium 10um with countersunk holes

Used only on high pile carpets

Inserts available: 51mm PVC Nitrite rubber –
Carborundum or luminous glow-in-the-dark

Weight: 0.815Kg/m

Length: 3620mm or cut to size

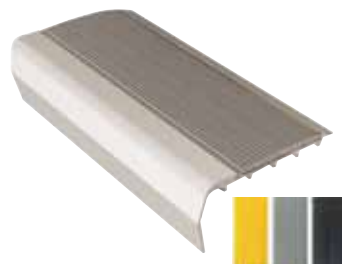

Product Code: RCF10GD 10mm x 71mm

10um Brass/gold Anodised aluminium profile with countersunk holes.

Inserts: Nitrite rubber in black, yellow or grey,
carborundum or luminous glow-in-the-dark.

Length: 3620mm or custom cut to size




Product Code: RKZGD 37mm x 75mm

10um Brass/gold Anodised aluminium profile with countersunk holes.

Inserts: Nitrite rubber in black, yellow or grey,
carborundum or luminous glow-in-the-dark.

Length: 3620mm or custom cut to size

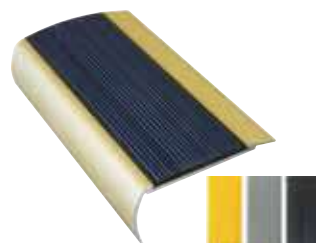

Fine Line Line Range of Aluminium Stair Nosings

Product code: RST50 8mm x 50mm

Anodised Aluminium Stair Edging
Available in clear anodized or black
Weight: 0.320Kg/m
Length: 3260mm or cut to required size



Product code: RST50B 8mm x 50mm

Black Anodised Aluminium Stair Edging
Weight: 0.320Kg/m
Length: 3260mm or cut to required size




Product code: FL71 37mm x 71mm

10um Anodised aluminium profile with 50mm x 2.5mm serrated Anodised aluminium insert in clear or black
Countersunk holes provided at 280mm centres with fixing tape to install the insert
Length: 3620mm or custom cut to size




Product Code: FL75 37mm x 75mm

10um Anodised aluminium profile with 50mm x 2.5mm serrated Anodised aluminium insert in clear or black
Countersunk holes provided at 280mm centres with fixing tape to install the insert
Length: 3620mm or custom cut to size




Product Code: FL10 10mm x 71mm

10um Anodised aluminium profile with 50mm x 2.5mm serrated Anodised aluminium insert in clear or black
Countersunk holes provided at 280mm centres with fixing tape to install the insert
Length: 3620mm or custom cut to size



Product Code: FL10BLK 10mm x 71mm

10um Black Anodised aluminium profile with 50mm x 2.5mm serrated Anodised aluminium insert in clear or black
Countersunk holes provided at 280mm centres with fixing tape to install the insert
Length: 3620mm or custom cut to size



Product Code: FL57 10mm x 57mm



10um Anodised aluminium profile with 50mm x 2.5mm serrated Anodised aluminium insert in clear or black
Countersunk holes provided at 280mm centres with fixing tape to install the insert
Length: 3620mm or custom cut to size



Franklin Range of Carborundum Stair Nosing



Product code: RST10 10mm x 74mm

5mm Anodised Aluminium
4 x 10mm black or yellow carborundum inserts
3620mm lengths or custom cut to size

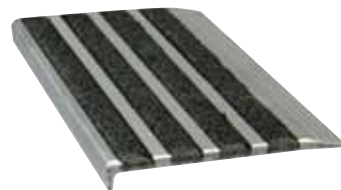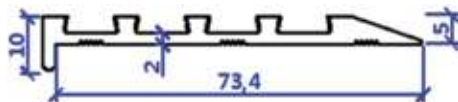



Product code: RC25 25mm x 75mm

5mm Anodised Aluminium
4 x 10mm black carborundum inserts
3620mm lengths or custom cut to size

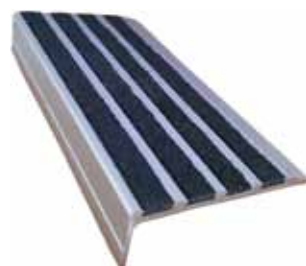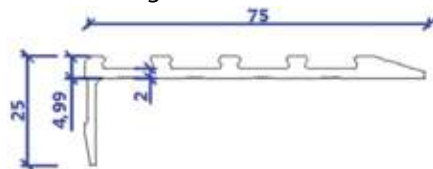



Product code: RC37 37mm x 80mm

5mm Anodised Aluminium
5 x 10mm black carborundum inserts
3620mm lengths or custom cut to size

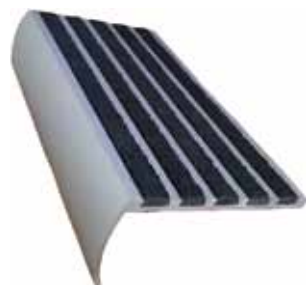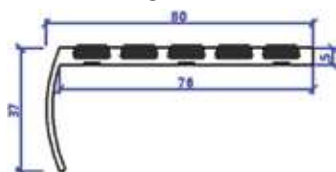



Product code: RC7 37mm x 83mm

5mm anodised aluminium
4 x 10mm black carborundum inserts
3620mm lengths or custom cut to size

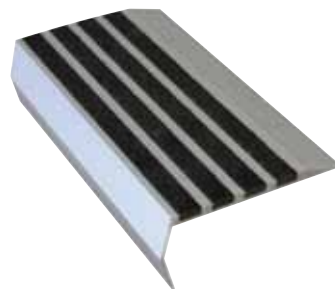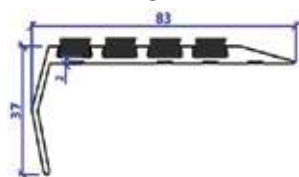



Product code: RC21 10mm x 76mm

5mm Anodised Aluminium
5 x 10mm black carborundum inserts
3620mm lengths or custom cut to size

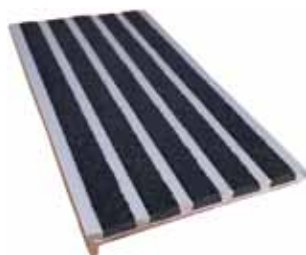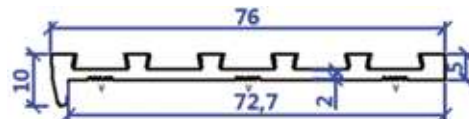


Product code: RC20 5mm x 50mm

5mm Anodised Aluminium
3 x 10mm black carborundum inserts
3620mm lengths or custom cut to size

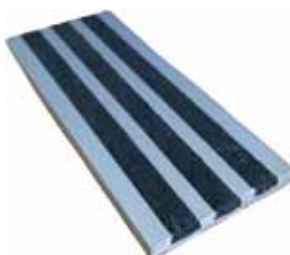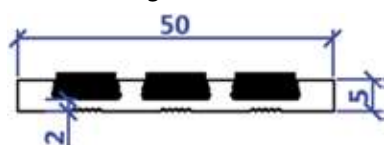




10um anodised aluminium with countersunk holes
50mm x 3mm carborundum insert
Insert: Yellow - black - grey
3620mm lengths or custom cut to size

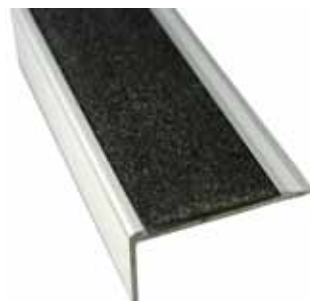


10um anodised aluminium with countersunk holes
50mm x 3mm carborundum insert
Insert: Yellow - black - grey
3620mm lengths or custom cut to size

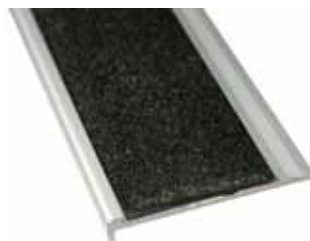

10um anodised aluminium with countersunk holes
50mm x 3mm carborundum insert
Insert: Yellow - black - grey
3620mm lengths or custom cut to size



10um anodised aluminium with countersunk holes
50mm x 3mm carborundum insert
Insert: Yellow - black - grey
3620mm lengths or custom cut to size

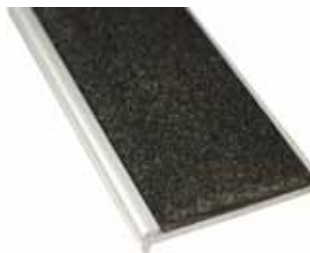

9

Floorsafe Luminous Stair Nosing


Our range of anodized aluminum profiles with luminous glow-in-the-dark inserts provide effective options to meet luminous contrast requirements.

Our quality products also ensure pedestrian safety, reduces the possibility of litigation for a building owner caused by slip and falls. Stair nosing's are an important part of Occupational Health and Safety (OH&S) both for domestic and commercial buildings.

The luminous 3 glow luminous strip inserts are charged by normal illumination through daylight or fluorescent light and omits a glow as soon as the natural light source is interrupted by a power failure, smoke obstruction or similar. The luminous glow will last 45-60 minutes which allows time for evacuation to take place.


Product code: RCFL 37mm x 71mm

Anodised Aluminium
50mm black rubber insert with
3 x glow-in-the-dark inserts
3620mm lengths or custom cut to size

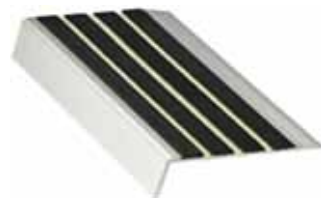


Product code: RCF10L 10mm x 71mm

Anodised Aluminium
Anodised aluminium
50mm black rubber insert with
3 x glow-in-the-dark inserts
3620mm lengths or custom cut to size

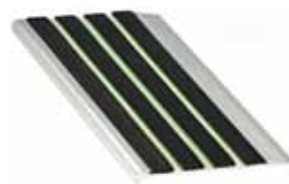

Product code: RNACL 37mm x 75mm

Anodised Aluminium
50mm black rubber insert with
3 x glow-in-the-dark inserts
3620mm lengths or custom cut to size

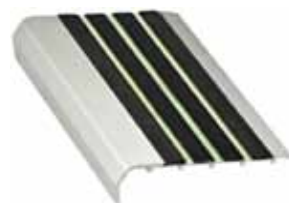

Product code: RKZL 37mm x 75mm

Anodised Aluminium
50mm black rubber insert with
3 x glow-in-the-dark inserts
3620mm lengths or custom cut to size



Product code: RNR10L 10mm x 57mm

Anodised Aluminium
50mm black rubber insert with
3 x glow-in-the-dark inserts
3620mm lengths or custom cut to size



Product code: RCF10BLKL 10mm x 71mm

Black Anodised Aluminium
50mm black rubber insert with
3 x glow-in-the-dark inserts
3620mm lengths or custom cut to size



Fibreglass Stair Nosings


Product code: FG1

Fibreglass stair nosing -
30mm x 70mm
Silicon anti-slip oxide grit
Safety yellow or black
Weight: 0.46Kg/m
Length: 3620mm or cut to required size




Product code: FGH

Fibreglass stair nosing -
30mm x 70mm
Silicon anti-slip oxide grit
Safety yellow/black
diagonal colour
Weight: 0.32Kg/m
Length: 3620mm or cut to required size



Product code: FG10

Fibreglass stair nosing
10mm x 70mm
Silicon anti-slip oxide grit
Safety yellow or black
Weight: 0.32Kg/m
Length: 3620mm or cut to required size



Product code MCLIP

Saddle/grating clip
316 Anti-corrosive
saddle/grating clip
Fixing stair treads to open mesh gratings
Available in various sizes



Fibreglass Plus Stair Nosings


Product code: FPL

Fibreglass Plus stair nosing - 30mm x 70mm
Enhanced with polyurethane finish
Diamond anti-slip oxide granules
Choice of 8 colours
Weight 0.48Kg/m
Length: 3620mm or cut to required sizes



Product Code: FPL10

Fibreglass Plus stair nosing - 10mm x 70mm
Enhanced with polyurethane finish
Diamond anti-slip oxide granules
Choice of 8 colours
Weight 0.36Kg/m
Length: 3620mm or cut to required sizes.

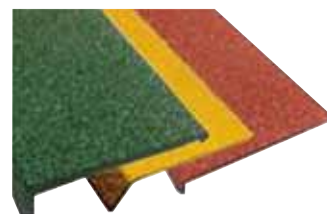

Fibreglass Ladder Rungs


4mm round ladder rungs
Silicon anti-slip finish
Available sizes: 20mm - 25mm & 30mm diameter
Various length sizes - Safety Yellow



Safety Stair Nosings and Plates

Product code: RMN

Safety stair nosing
Metal angle coated with heavy duty chemical resistant
2-part Anti-slip polyurethane coating
Available in any Australian standard colour
Standard sizes:
35mm x 50mm - 35mm x 75mm - 35mm x 90mm
Also custom made to size required

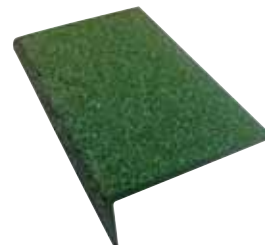

Product code: RMN10

Safety stair nosing - Conforming to Compliance
Metal angle coated with heavy duty chemical resistant
2-part Anti-slip polyurethane coating
Available in any Australian standard colour
Standard sizes:
10mm x 50mm - 10mm x 75mm - 10mm x 90mm
Also custom made to size required



Anti-Slip Metal Plates

Product code: RMNPL


Metal angle coated with heavy duty chemical resistant
2-part anti-slip polyurethane coating
Available in any colour
Custom made to any size














Rubber Stair Nosing

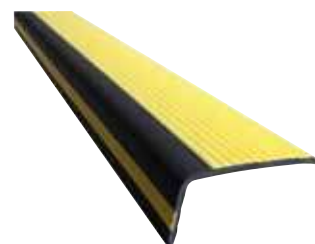Product code: SNO60

PVC 2 colour - 28mm x 60mm
Go-Extruded 2700mm heavy duty
Resistant against ageing, anti-bacterial,
flame retardant & stain resistant
Colours:
Black
Black/yellow
Black/grey



Floorsafe Range of Compliant Stair Nosings

	RST50	Clear anodised serrated aluminium	10mm x 50mm
	RST50B	Black anodised serrated aluminium	10mm x 50mm
	RCF10	Aluminium with choice of rubber colour, carborundum or fine line aluminium insert	10mm x 71mm
	RCF10BLK	Anodised aluminium with a choice of rubber colour, carborundum, luminous or fine line aluminium insert	
	RCF10GD	Anodised aluminium with a choice of rubber colour, carborundum, luminous or fine line aluminium insert	
	RNR10	Aluminium with rubber colour, carborundum or fine line aluminium insert	10mm x 57mm
	RST10	Anodised aluminium with carborundum inserts	10mm x 75mm
	RC21	Aluminium with 5 carborundum inserts	10mm x 76mm
	RMN10	Metal nosings coated with 2-part anti-slip coating	Standard sizes: 10mm x 50mm 10mm x 75mm 10mm x 90mm
	FG10	Fibreglass stair nosing in safety yellow or black	10mm x 70mm
	FPL	Fibreglass Plus stair nosing in all colours	10mm x 70mm

Anti-Slip Strips and Inlays


Carborundum RC20 Anti-Slip Strips

5mm Step Inlay

5mm x 50mm anodised aluminium

3 x 10mm carborundum inserts

3620mm lengths or custom cut to size

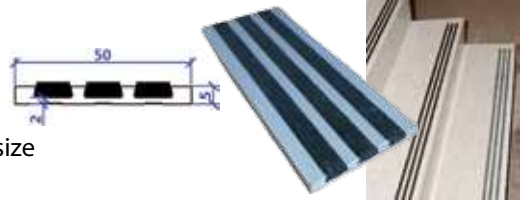

Fibreglass FG50 Anti-Slip Strips

Anti-slip safe to AS/NZS 4586:2004

Fibreglass strips are manufactured to provide a tough, flexible and abrasion slip-resistant finish for internal and external use.

SIZE: 3mm x 50mm available in 3620mm lengths or cut to size required

COLOURS: Available in any Australian standard colour

FIXING: With adhesive and screws



Fine Line FL50 Serrated Anti-Slip Strip

2.5mm thickness x 50mm that can be installed with adhesive or screw fixed.

Strip can also be rebated into steps.

Length 3620mm or custom cut to sizes required

Available in clear anodised or black.



Anti-Slip Metal Strips

Product Code: CARB


Anti-slip safe to AS/NZS 4586:2004

Floorsafe Australia Carborundum Anti-slip strips are specially made for installation over new and existing steps, ramps, stairways and walkways. It is applicable where pedestrian safety is a particular concern.

The strips are constructed from a 1.6mm galvanised flat metal strip and coated with a hard wearing UV & chemical resistant 2- part Polyurethane anti-slip coating.

SIZE: Available in 2400mm lengths or cut to required length sizes. Standard stock widths are 40mm & 50mm but we can custom make to any width and length.

COLOURS: Available in any Australian standard colour.

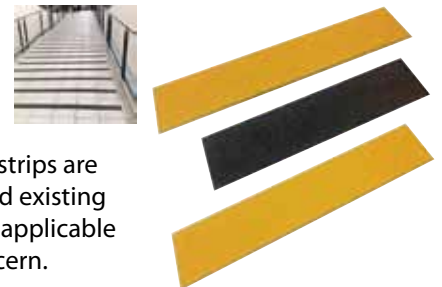

316 Solid Stainless Steel Tactile Indicators

Product code: T01

316 solid stainless steel tactile
 Concentric ring on face flat base
 35mm diameter x 4.5mm
 Packaging: 500/carton - Weight: 12Kgs
 Warranty 10 years
Also available in self-adhesive T01SA



Product code: T02

316 solid stainless steel tactile
 Concentric ring on face with 12mm x 6mm stem
 35mm diameter x 4.5mm
 Packaging: 500/carton - Weight: 16Kgs
 Warranty 10 years



Product code: T02P

316 solid stainless steel tactile
 Concentric ring on face with 18mm x 8mm
 self-locking stem - 35mm diameter x 4.5mm
 Packaging: 500/carton - Weight: 16Kgs
 Warranty 10 years



Product code: T03

Solid brass tactile indicator with
 12mm, 18mm and 30mm x 8mm self-locking stem
 35mm diameter x 4.5mm
 8 year warranty
 Packaging: 500/carton - Weight: 16Kgs
Also available in self-adhesive T03SA



Product code: T05

316 solid stainless steel tactile
 Flat base with carborundum infill
 35mm diameter x 4.5mm
 Black or yellow infill
 8 year warranty
 Packaging: 500/carton - Weight: 10Kgs
Also available in self-adhesive T05SA



Product code: T06

316 solid stainless steel with carborundum infill
 with 18mm x 8mm self-locking stem
 35mm diameter x 4.5mm
 Black or yellow infill
 8 year warranty
 Packaging: 500/carton - Weight: 16Kgs



Product code: T07

316 solid stainless steel tactile
 Concentric ring on face with 3mm stem
 35mm diameter x 4.5mm
 Packaging: 500/carton - Weight: 14Kgs
 Warranty 10 years



316 Solid Stainless Steel Tactile Indicators

Product code: T08

316 solid stainless steel tactile with con-ring
Complete with plug and screw
35mm diameter x 4.5mm
Packaging: 500/carton
Weight: 16Kgs
Warranty 10 years



Product code: T022

316 stainless steel tactile.
Black plastic insert with 18mm x 8mm
self-locking stem
35mm diameter x 4.5mm
Packaging: 500/carton
Weight: 14Kgs
Warranty 10 years



Product code: T025

Solid PVD black tactile indicator
with 18mm x 8mm self-locking stem
35mm diameter x 4.5mm
Packaging: 320/carton
Weight: 16Kg
Warranty 10 years



Product code: T026

316 solid stainless steel tactile
with 25mm x 8mm self-locking stem
35mm diameter x 4.5mm
Packaging: 500/carton
Weight: 16Kgs
Warranty 10 years



Product code: T14

316 stainless steel directional bar
12 grooves on face
290mm x 35mm x 3 stems
Warranty 10 years



Product code: T18

Tactile adhesive 300 gram cartridge
Packaging: Single items
Will install 250-300 tactiles



PVC Tactile Indicators and Pads

Product code: T11D

PVC plastic tactile directional bar
290mm x 35mm x 5 stems
Black, yellow, white, ivory




Product code: T09

PVC plastic tactile with 20mm stem
Colours as shown
Also available in self-adhesive T09SA




Product code: T10

Hazardous silicon rubber Tacpad 72
300mm x 600mm
Supplied with adhesive and surface primer
Colours as shown



Product code: T11

Directional silicon rubber Tacpad
300mm x 600mm
Supplied with adhesive and surface primer
Colours as shown



Self-Adhesive Peel and Stick Tactile Pads


Product code: T19

Polyurethane hazardous peel & stick tactile pads
Supplied with Surface Primer
300mm x 600mm
Black, yellow, grey and terracotta



Product code: T20

Polyurethane hazardous peel & stick tactile pads
Supplied with Surface Primer
300mm x 300mm
6 Colours as shown

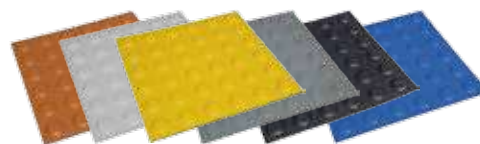

Product code: T20D

Polyurethane directional peel & stick tactile pads
Supplied with Surface Primer
Available in 6 colours.



Quick-Fix Self-Adhesive Individual Tactiles

Available in PVC – Stainless Steel – Carborundum infill and Brass
SAVE TIME – SAVE MONEY
NO drilling holes – NO risk of breaking tiles- NO adhesive
NO mess - NO dry time



Tactile Plates and Templates


Product code: TP36

316 Stainless Steel plate with 72 welded
 316 stainless steel tactiles
 300mm x 600mm
 Weight: 4.5Kgs




Product code: TP36C

316 Stainless Steel plate with 72 welded
 316 stainless steel carborundum infill tactiles
 10 year warranty
 300mm x 600mm
 Weight: 4.5Kgs



Product code: TP36P

316 Stainless Steel tactile plate with 72 welded
 T22 PVD tactiles - 10 year warranty
 300mm x 600mm
 Weight: 4.5Kgs



Product code: T16DR

Galvanised directional template
 300mm x 600mm
 Weight: 1.5Kgs



Product code: ABS-C

Contractors plastic interlocking template
 for installing flat type tactiles
 300mm x 600mm



Product code: ABS-S

Contractors plastic interlocking template
 for installing stem type tactiles
 300mm x 600m



Skateboard Deterrents

Product code: T13

Button type
 316 stainless steel
 30mm depth x 20mm height x 20mm stem



Product code: T15

Corner type
 316 stainless steel with 2 x 30mm x 6mm stems
 125mm length x 15mm wide x 25mm on face



Product code: T17

Wedged skateboard deterrent
 316 stainless steel
 80mm depth x 80mm height x 5mm



Full Step Rubber Treads for Steps, Stairways and Ramps



Introduction

Full Step Safety Rubber Stair Treads have been specially designed by Floorsafe Australia Pty Ltd to be installed over new and existing steps and stairways where pedestrian safety, stair appearance & stair longevity is of particular concern.

It is slip resistant when wet and offers noise reduction together with long term wear properties.

Roll size: Up to 40 linear metres

Width: 1250mm

Weight: 1015 grams per sq. metre

Tensile strength: 2.35/Nmm²

Tear Resistant: 15.5 N/mm

Temp Resistant: 40C- 115C

Offers slip resistance to AS/NZ5458



Fire Indices: AS/NZ1530.1999

Product:

- Outstanding slip resistance under wet or dry conditions
- Amazing noise reduction the product offers
- A quality 8mm thick EPDM rubber which provides long term wear properties
- A special 2-part adhesive supplied to install rubber treads
- The chosen aluminium nosing has countersunk holes @ 270mm centres for fixing into surface
- Nosing can be selected from our range of aluminium or coloured rubber nosings

Colours:

Black, black/grey, black/red, black/green

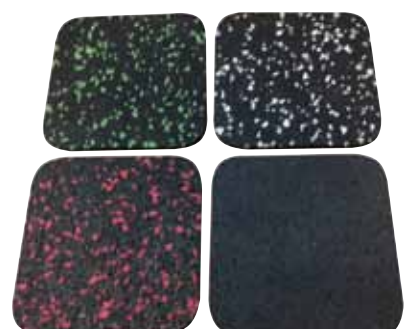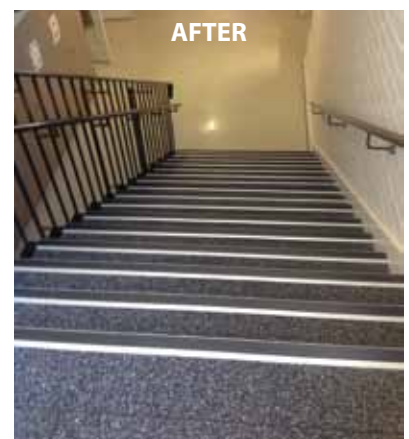

Self-Adhesive Anti-Slip Tapes

Grade:

36# and 60# aluminium oxide grit

Thickness: 0.8mm

Tensile strength: 7

Adhesion: 600gm/cm

Elongation at break: 80%

Application:

Applied where there may be a safety hazard due to slipping on smooth and wet surfaces both inside and outside.

Durability:

Provides a tough and durable slip resistant surface.

Exceeds the AS/NZ slip standards required.

Adhesion:

Applied to clean and dry surface between 12-35C degrees. Floorsafe Surface Primer is available to aid adhesion.

Colours and Sizes:

All rolls are 18.3 metres in length.

Black, green, yellow and yellow/black, available in the following widths:

25mm - 50mm - 100mm - 150mm - 200mm - 300mm

White, blue, grey, luminous, red and clear heavy duty, available in the following widths:

25mm - 50mm

Non abrasive tape, available in the following colours and widths:

Clear - white - black

25mm - 50mm



Self-Adhesive Non-Abrasive Safety Tape

Application:

Non-abrasive self-adhesive tapes are tough & durable and provide an excellent slip resistance because of the grip provided by the uneven vinyl surface finish of the tape.

Unlike products that have a sandpaper type finish the non-abrasive product causes no discomfort to bare feet.

Colours and Sizes:

All rolls are 50mm wide x 18.3 metres in length.

Clear, black and white



Anti-Slip Self-Adhesive Mats

Colours and Sizes:

Available as seen above.

Size: 600mm x 150mm

Black luminous stripe - Product code: MLS

Caution - Product code: MCAU

Watch Your Step - Product code: WYS





Glow-In-The-Dark Self-Adhesive and Anti-Slip Tapes

Grade:

Medium 60 aluminium oxide grit
Thickness: 0.8mm
Tensile strength: 7
Adhesion: 600gm/cm
Elongation at break: 80%



Application:

Applied where safety is required due to POOR LIGHT. Luminous glow-in-the-dark is charged by light and can be effective for up to 60 minutes.

Durability:

Provides a tough & durable slip resistant surface. Exceeds the AS/NZ slip standards required.

Adhesion:

Applied to clean and dry surface between 12-35C degrees. Floorsafe Surface primer is available to aid adhesion.

Colours and Sizes:

Black with luminous centre line - Product code: TPL50
18.3 metres x 50mm
Plain glow-in-the-dark
25mm x 18.3 metre rolls - Product code: TL25
50mm x 18.3 metre rolls - Product code: TL50

Floorsafe Surface Primer

Clear water base primer for use on porous surfaces

A single component water based acrylic coating used to penetrate and prime concrete, masonry surfaces and most types of porous surfaces to promote adhesion of anti-slip grip tapes and tactile pads.



CONTAINER SIZES:

500mls, 1 litre, 2 litre and 5 litre

COVERAGE:

8-10 square metres

COLOUR:

Clear liquid

SUBSTRATE PENETRATION:

All surfaces to be clean and sound and free of efflorescence and contamination.

Apply when temperature is above 8 degrees and dry

APPLICATION:

By brush or roller

DRY TIME:

15-20 minutes depending on temperature



Conformable Checker Plate Anti-Slip Tape



Grade:

Medium 36 aluminium oxide grit

Solvent acrylic adhesive

Temperature range: -30° to +80°C

Adhesion to steel: (9/25.4mm²) 2000

Thickness: 0.8mm

Tensile strength: 7

Adhesion: 600gm/cm

Elongation at break: 80%

Application:

Applied where the surface is uneven. Ideal for installation on metal checker plate because the tape has a soft foil backing which takes up the profile of an uneven surface.

Durability:

Provides a tough and durable slip resistant surface.

When tested to ASTM C 1028-96 the test exceeded the required rating of 0.5 on wet surfaces.

Wet test: 1.14 - Dry test: 0.98

Will meet the AS/NZ standard slip test requirements.

Adhesion:

Applied to clean and dry surface between 12-35C degrees. Floorsafe Surface primer is available to aid adhesion.

Colours and Sizes:

Colours available: Black, yellow, black/yellow stripe

Roll length: 18.3m **Widths:** 50mm – 100mm & 150mm

Black	Yellow	Black/Yellow stripe
TCB50 50mm	TCY50 50mm	TCBY 50mm
TCB100 100mm	TCY100 100mm	TCBY 100mm
TCB150 150mm	TCY150 150mm	TCBY 150mm

Class 1 Self-Adhesive Reflective Tapes



Grade:

Class 1 Engineering Grade
Service life: 1-10 years
Thickness of finished product: 0.41mm
Adhesive: Pressure-sensitive tape
Surface film: Acrylic
Meets the standards ASTM or EN 12899.

Application:

Signage for traffic signs, trucks, cars and other vehicles.
Use to highlight the dangers of poles, posts and bollards.
Use for advertising signs and silk printing.

Adhesion:

Applied to clean and dry surface between 5-30C degrees.
Floorsafe Surface primer is available to aid adhesion.

Colours:

Red/white, yellow/black
Plain white, red, green, yellow and fluoro yellow.

Sizes:

Product code: RT1
Roll lengths: 9 metre & 45.7 metres
Width size: 50mm

Class 2 Self-Adhesive Reflective Tapes



Grade:

Class 2 Commercial grade
Service life: 1-3 years
Thickness of finished product: 0.41mm
Adhesive: Pressure-sensitive tape
Surface film: Acrylic

Application:

Signage for traffic signs, trucks, cars and other vehicles.
Use to highlight the dangers of poles and bollards.
Use for advertising signs and silk printing.

Adhesion:

Applied to clean and dry surface between 5-30C degrees.
Floorsafe Surface primer is available to aid adhesion.

Colours:

Red/white, yellow/black, blue/white, green/white, yellow/red - Plain white, red, green, yellow.

Available sizes:

9 metres x 50mm -
Product code: RT509
45.7 metres x 50mm -
Product code: RT50
9 metres x 100mm -
Product code: RT1009
45.7 metres x 100mm -
Product code: RT100



Floorsafe Anti-Slip Treatment



Unique anti-slip system treatment:

An award winning 3 and 4 step anti-slip application that makes slippery when wet floors anti-slip safe.

For use on ceramic, quarry, porcelain, terrazzo, and concrete areas inside and outside.

A proven Australian made product since 1987.

Meets the required slip standards AS/NZS 4586:2004

AS/NZ 4663:2004

ASTME 303

Durability:

When installed by a Floorsafe applicator, this product is guaranteed for 2 years and will last for many years with regular maintenance cleaning.

Features:

Anti-slip effective even when the surface is wet. No dry time. No or very little change in surface appearance after treatment. No smells, no noise, no mess and can be walked upon immediately after treatment. Available in pack sizes to meet your needs.

Packaging:

5 Sq. metre (55 Sq. ft) - Product code: 5C - Weight 3Kgs

10 Sq. metre (110 Sq. ft) - Product code: 10C - Weight 5Kgs

20 Sq. metre (220 Sq. ft) - Product code: 20C - Weight 9Kgs

30 Sq. metre (330 Sq. ft) - Product code: 30C - Weight 12Kgs

50 Sq. metre (550 Sq. ft) - Product code: 50C - Weight 22Kgs

60 Sq. metre (660 Sq. ft) - Product code: 60C - Weight 24Kgs

200 Sq. metre (2200 Sq. ft) - Product code: 200C - Weight 88Kgs



Floorsafe Bath & Shower Safe



Award winning anti-slip treatment:

Meets AS/NZ 3116.1 slip standards.

Bath & Shower Safe provides added safety in the bathtub or shower for the young, the old and those with limited mobility.

Proven 20 year effectiveness.

More hygienic than a bathmat or stick on tapes.

Application:

5 minute application using 250mls of product will make a shower base or a Porcelain and Enamel bath tub anti-slip safe.

Durability:

When installed by a Floorsafe applicator, this product is guaranteed for 2 years and will last for many years with regular maintenance cleaning.

Shelf life: 12 months stored out of sunlight.

Features:

Anti-slip effective even when the surface is wet.

No dry time and no closing off areas for long periods. No or very little change in surface appearance after treatment. No smells. No mess. Treated area can be used immediately after treatment.

Packaging:

250ml pack size - Product Code: BS250

2 Litre - Product Code: BS200

5 Litre plastic bottles - Product Code: BS5000

4 x 5 Litre - Product Code: BS45

4 x 5 Litre - Carton size 375mm x 270mm x 290mm 0.029CBM



Floorsafe Commercial Maintenance Cleaner - CMC



Description:

This unique cleaner does two jobs at the same time. It hygienically cleans and at the very same time revitalizes the anti-slip effect. Regular use of this product will keep floors safe for many years before re-treatment is necessary. The product contains a balance blend of quality surfactants that produces its powerful performance in cleaning especially on floors subjected to grease, fats or oils. Developed and manufactured by Floorsafe Australia since 1987.

Application:

Dilute with up to 30 parts of clean hot or cold water.

Greasy oily surfaces:

Dilute with 20 parts of hot water. Brush the mixed solution over the floor surface and rinse with plenty of water. Squeegee or wet vacuum up.

Features:

Its powerful active ingredients will leave greasy floors hygienically clean and anti-slip safe.

Packaging:

4 x 5 Litre carton size: 375mm x 270mm x 290mm 0.029CBM

5 Litre plastic bottles - Product code: CMC5

5 Litre x 4 bottles - Product code: CMC45

1 x 20 Litre plastic drum - Product code: CMC20

Also available in concentrate form

5 Litre bottles - Product code: CMCC5

5 Litres will make 20 Litres of ready to use product.



Floorsafe Domestic Maintenance Cleaner - DMC



Grade:

Quality and proven performance. Contains 3% disinfectant with Floorsafe's heavenly fragrance. Contains no acids or bleach. Safe to use. Developed and manufactured by Floorsafe Australia since 1999.

Application:

Cleans, disinfects and keeps surfaces hygienically clean.

Ideal for all types of floor surfaces, wash rooms, basins, bench tops, mirrors, glass and general cleaning both in commercial and domestic situations.

Durability:

A concentrated disinfectant all-purpose cleaner.

Can be diluted up to 50 times with water for general cleaning.

Shelf Life: 24 months.

Features:

With its powerful active ingredients will leave surfaces sparkling clean and germ free.

Packaging:

4 x 5 Litre Carton size 375mm x 270mm x 290mm 0.029CBM

4 x 5 Litre plastic bottles - Product code: DMC45

1 x 20 Litre plastic drum - Product code: DMC20

Also available in concentrate form

5 Litre bottles - Product code: DMCC5

5 Litres will make 20 Litres of ready to use product.



Floorsafe

ADD-A-GRIP for Vinyl and Timber Floors



Grade:

Formulated and manufactured by Floorsafe Australia in 2005 from the finest quality ingredients.

Application:

Simply add solution to your mop cleaning bucket or dilute with 10 parts of clean water and mop over floor surface and leave to dry.

Durability:

The invisible slip resistant film will be removed with on-going washing and/or foot traffic. One application may remain effective for approx. seven washes. Thereafter the product needs to be re-applied.

Features:

Anti-slip effect that is invisible to the eye. No extra labour time required to apply the solution. No smells. No mess.

Packaging:

Carton Size: 375mm x 270mm x 290mm 0.029 CBM

2 Litre bottles - Product code: AG2 Weight 2.2Kgs

5 Litre bottles - Product code: AG5 Weight 5.5Kgs

20 Litre plastic drum - Product code: AG20 Weight 22Kgs

Available in concentrate

5 Litre bottles - Product code: AGC5 Weight 5.8Kgs

5 Litres will make 20 Litres of ready to use product.

www.floorsafe.com.au



FLOORSAFE AUSTRALIA PTY LTD
88 Gibson Street
Bowden
South Australia 5007

AUSTRALIAN CUSTOMERS
Ph: 1300 717 769
Fax: 1300 400 434
Email: sales@floorsafe.com.au

OVERSEAS CUSTOMERS
Ph: +61 8 8410 0054
Fax: +61 8 8410 0058
Email: sales@floorsafe.com.au